



Visit product page



FOS CYCLONE PRO D2

L005488

Powerful moving Strobe IP65, 480 leds RGB 3in1 in 8 Pixel Sections, 144 leds 5 watt - 6500k White in 4 pixel sections , Tilt movement 185 degrees, Led Macro Effects , 0-100 Linear Dimmer, 20HZ Strobe Effect, True Power 1000w. Powerful moving Strobe IP65, 480 leds RGB 3in1 in 8 Pixel Sections, 144 leds 5 watt - 6500k White in 4 pixel sections , Tilt movement 185 degrees, Led Macro Effects , 0-100 Linear Dimmer, 20HZ Strobe Effect, True Power 1000w.

TECHNICAL DETAILS

Light Source / Optics

Panel section:

LED Type: 5050 0,5W RGB 3 in 1 LEDs

Quantity: 480

Independent control segments: 8 (2x 4)

Tube section:

LED Type: 3535 5W 6500K (cool white)

Quantity: 144

Independent control segments: 4

Effects

Blinder & strobe effects

Strobe frequency: 20Hz maximum.

electronic dimming 0 - 100%.

Tilt movement: 185°

RGB section with 8 total segments for independent control.

Tube section with 4 in total segments of cool white powerful LEDs for independent control.

Pre-programmed chases and effects, accessible via DMX control.

Control

DMX control via 7, 14 or 42 channels.

Auto & Manual color selection via options menu.

RDM support.

Temperature controlled cooling system, with overheating protection.

Installation / Dimension details

Power supply: 100/240 Volt AC, 50 / 60 Hz.

Consumption: 1000 Watt max.

Maximum operating ambient temperature: -10°C - 50°C

Mounting: Floor or truss (with omega brackets).


Dimensions: 482 x 178 x 243 mm (L x W x H, height measured with the head in horizontal position).

Weight: 10 Kg.

Packing Details

Carton box (1 pc): 63 x 34 x 22 cm - 12 kg

PHOTOS

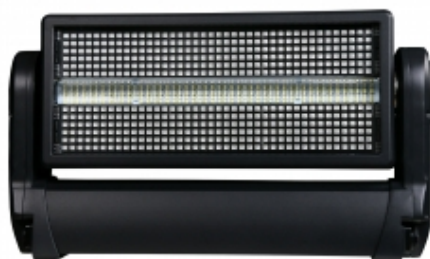

PRODUCT VIDEO



ACCESSORIES



FC-TP-PDC-5

Professional

TruePowercon/ DMX cable 5 meter.



FC-TP-PDC-3

Professional

3 meter.



FC-TP-PDC-1.5

Professional

1.5 meter.



FOS Case Cyclone PRO/F-6
GO

Flight case with wheels for
4 pcs Cyclone PRO or F

